

### Product Photos




Item	Specification
Clear-Span Width	9m / 10m / 12m / 15m
Eave Height	2.6m
Ridge Height	4.2m / 4.4m / 4.8m / 5.3m
Roof Pitch	20°
Bay Distance	3m
Longest Component	4.8m / 5.4m / 6.4m / 8.0m
Minimum Tent Length	9m
Maximum Tent Length	No Limit
Main Profile	120 x 68 x 3mm (4-channel)
Max Allowed Windspeed	80km/hr 0.3kn/m <sup>2</sup>
Eave Connection	Hot-dip galvanized steel insert
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)
Cover Material	PVC-coated Polyester textile, flame retardant to DIN 4102 B1,M2. 750-900g/m <sup>2</sup>

### Product Info


The Reception Tent is the start for our professional 3m bay event range. The Reception Tent offers popular clear-span widths of 9m, 10m 12 and 15m with an eave height 2.6m. The Reception Tent series are available with a complete range of accessories including sidewalls with clear windows, roof lining glass wall & door systems ABS solid walling system & flooring system.

**Accessories:**  
 PVC window sidewalls  
 Anchoring  
 Rain gutter  
 Lining & curtains  
 Glass door units  
 Hard walling system  
 Glass walling system  
 Transparent PVC cover & sidewall  
 Flooring System  
 Weight plate


### Technical Diagrams

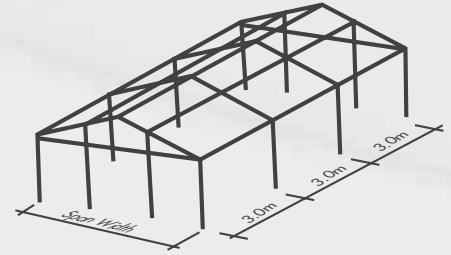


Type:  
HT9/260

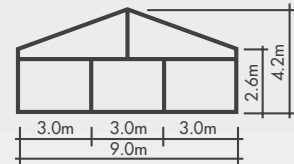


Type:  
HT10/260

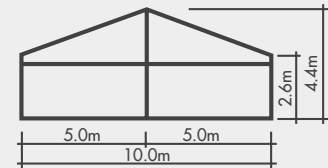

Type:  
HT12/260

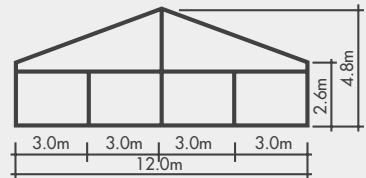


Type:  
HT15/260

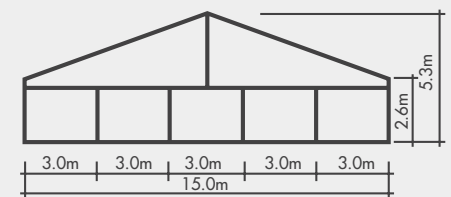

### Profiles


Framework Main profile dimensions and use



upright support

roof beam

gable pole



Ridge Purlin

Eave Purlin

Intermediate Purlin



Sidewall  
upside rail